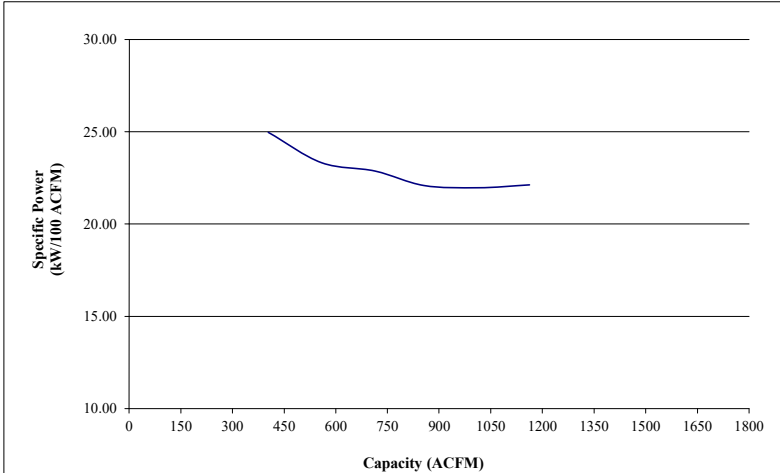


COMPRESSOR DATA SHEET

In Accordance With Federal Uniform Test Method for Certain Lubricated Air Compressors
Rotary Compressor: Variable Frequency Drive

MODEL DATA - FOR COMPRESSED AIR

1	Manufacturer:	Hertz Kompressoren		
2	Model Number:	IMPETUS VSD 200	Date:	03/07/23
	<input checked="" type="checkbox"/> Air-cooled <input type="checkbox"/> Water-cooled	Type: Screw		
	<input checked="" type="checkbox"/> Oil-injected <input type="checkbox"/> Oil-free	# of Stages:	2	
3	Rated Operating Pressure	175	psig ^b	
4	Drive Motor Nominal Rating	270	hp	
5	Drive Motor Nominal Efficiency	97	percent	
6	Fan Motor Nominal Rating (if applicable)	7.0 / 3.0	hp	
7	Fan Motor Nominal Efficiency	88 / 84	percent	
8*	Input Power (kW)	Capacity (acfm) ^{a,d}	Specific Power (kW/100 acfm) ^d	
	257.2	Max	1162.9	22.12
	222.5		1012.9	21.97
	188.9		855.4	22.09
	163.4		714.7	22.87
	130.4		559.0	23.32
	100.9	Min	404.0	24.97
9*	Total Package Input Power at Zero Flow ^{c, d}	36.6	kW	
10	Isentropic Efficiency	81.0	Percent	
11	 <p style="text-align: center; font-size: small;"> Note: Graph is only a visual representation of the data in Section 8 Note: Y-Axis Scale, 10 to 35, + 5kW/100acfm increments if necessary above 35 X-Axis Scale, 0 to 25% over maximum capacity </p>			

*For models that are tested in the CAGI Performance Verification Program, these items are verified by the third party administrator

Consult CAGI website for a list of participants in the third party verification program:

www.cagi.org

NOTES:

- a. Measured at the discharge terminal point of the compressor package in accordance with ISO 1217, Annex E; ACFM is actual cubic feet per minute at inlet conditions.
- b. The operating pressure at which the Capacity (Item 8) and Electrical Consumption (Item 8) were measured for this data sheet.
- c. No Load Power. In accordance with ISO 1217, Annex E, if measurement of no load power equals less than 1%, manufacturer may state "not significant" or "0" on the test report.
- d. Tolerance is specified in ISO 1217, Annex E, as shown in table below:

NOTE: The terms "power" and "energy" are synonymous for purposes of this document.



Member

Volume Flow Rate at specified conditions		Volume Flow Rate	Specific Energy Consumption	No Load / Zero Flow Power
m ³ / min	ft ³ / min	%	%	%
Below 0.5	Below 17.6	+/- 7	+/- 8	+/- 10%
0.5 to 1.5	17.6 to 53	+/- 6	+/- 7	
1.5 to 15	53 to 529.7	+/- 5	+/- 6	
Above 15	Above 529.7	+/- 4	+/- 5	