

250

hertz
KOMPRESSOREN

NEW



EAGLE
VSD

WATER
COOLED 

EAGLE


Oil-Free Rotary Screw Air Compressors

150-340 HP

NEW GENERATION

EAGLE

Take your production into the future with our Class 0 certified oil-free screw compressors with low energy consumption and superior air quality!

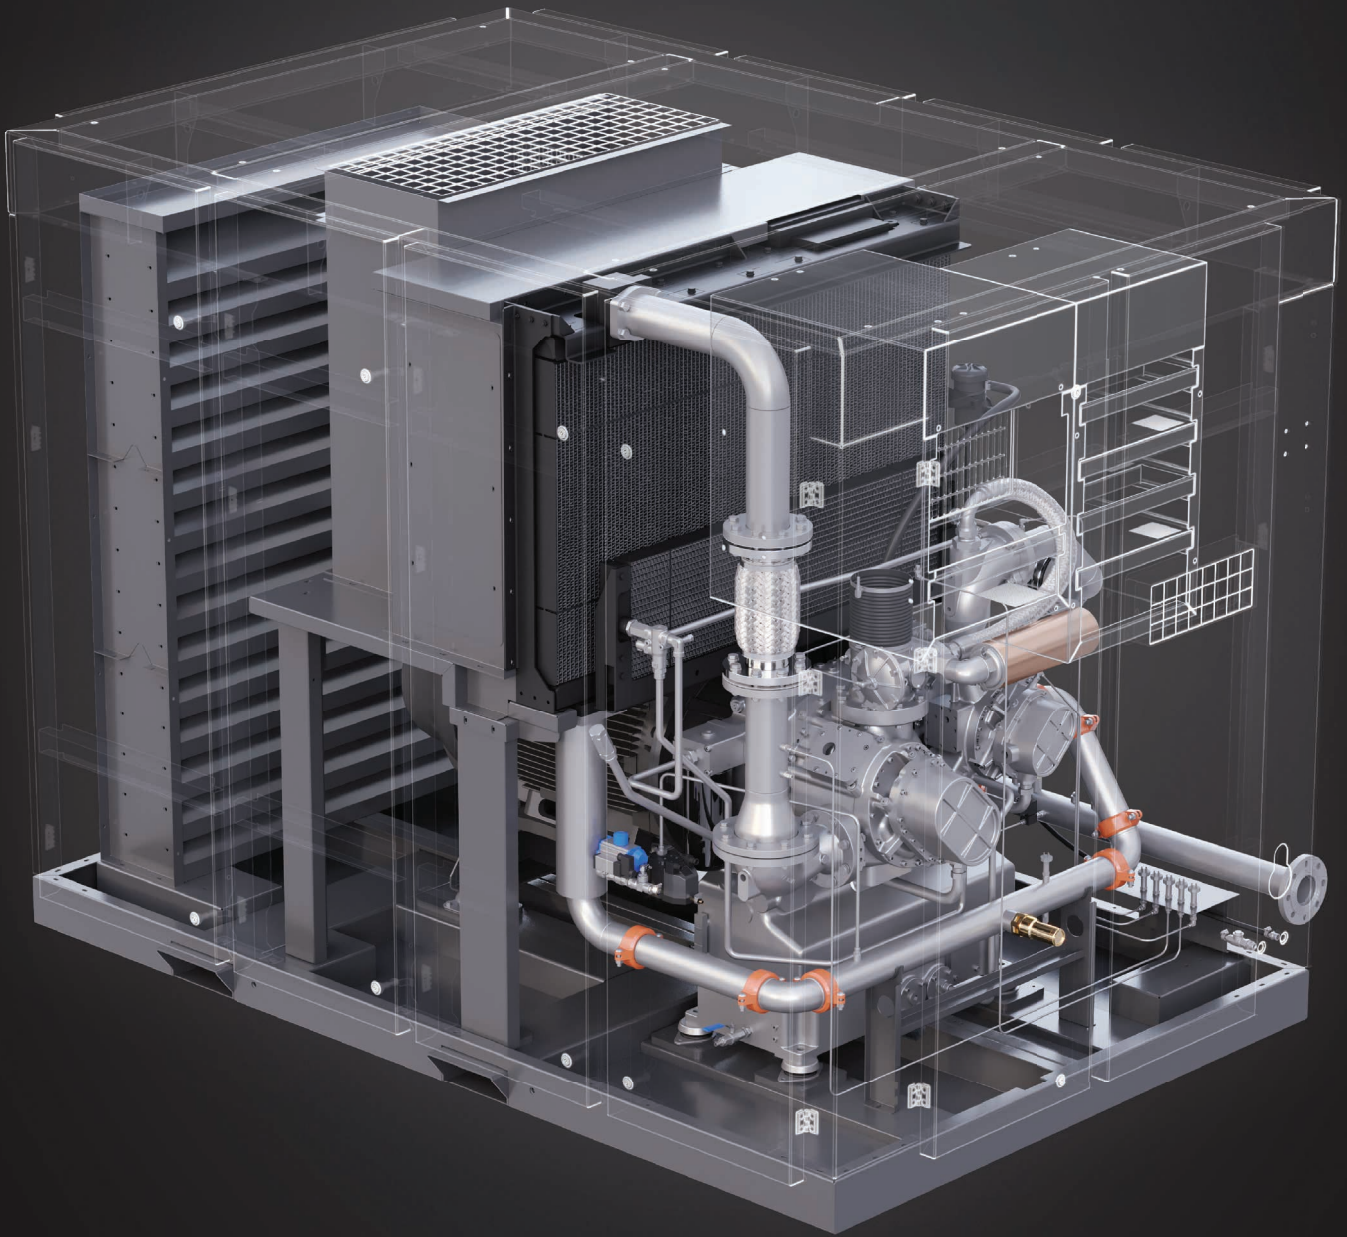



424-1535
cfm

150-340
HP

100-125-
150
psi

CAGI
Compressed Air & Gas Institute

EAGLE SERIES

*Oil-Free, Direct Coupled, Fixed/Variable Speed
Rotary Screw Compressors*

We offer more sustainable, Class 0-certified, fully oil-free air solutions for the food, beverage, chemical and electronics industries.




General Features

- IE4 efficiency-class electric motors
- Soundproofed canopy
- Electrostatic coated canopy components for high corrosion resistance
- Electric motor protection to prevent overload
- Air-cooled and water-cooled options
- Fixed and variable speed drive options
- Soft starter at fixed speed models
- Direct coupled drive system

ISO 8573-1

**CLASS
OIL-FREE**

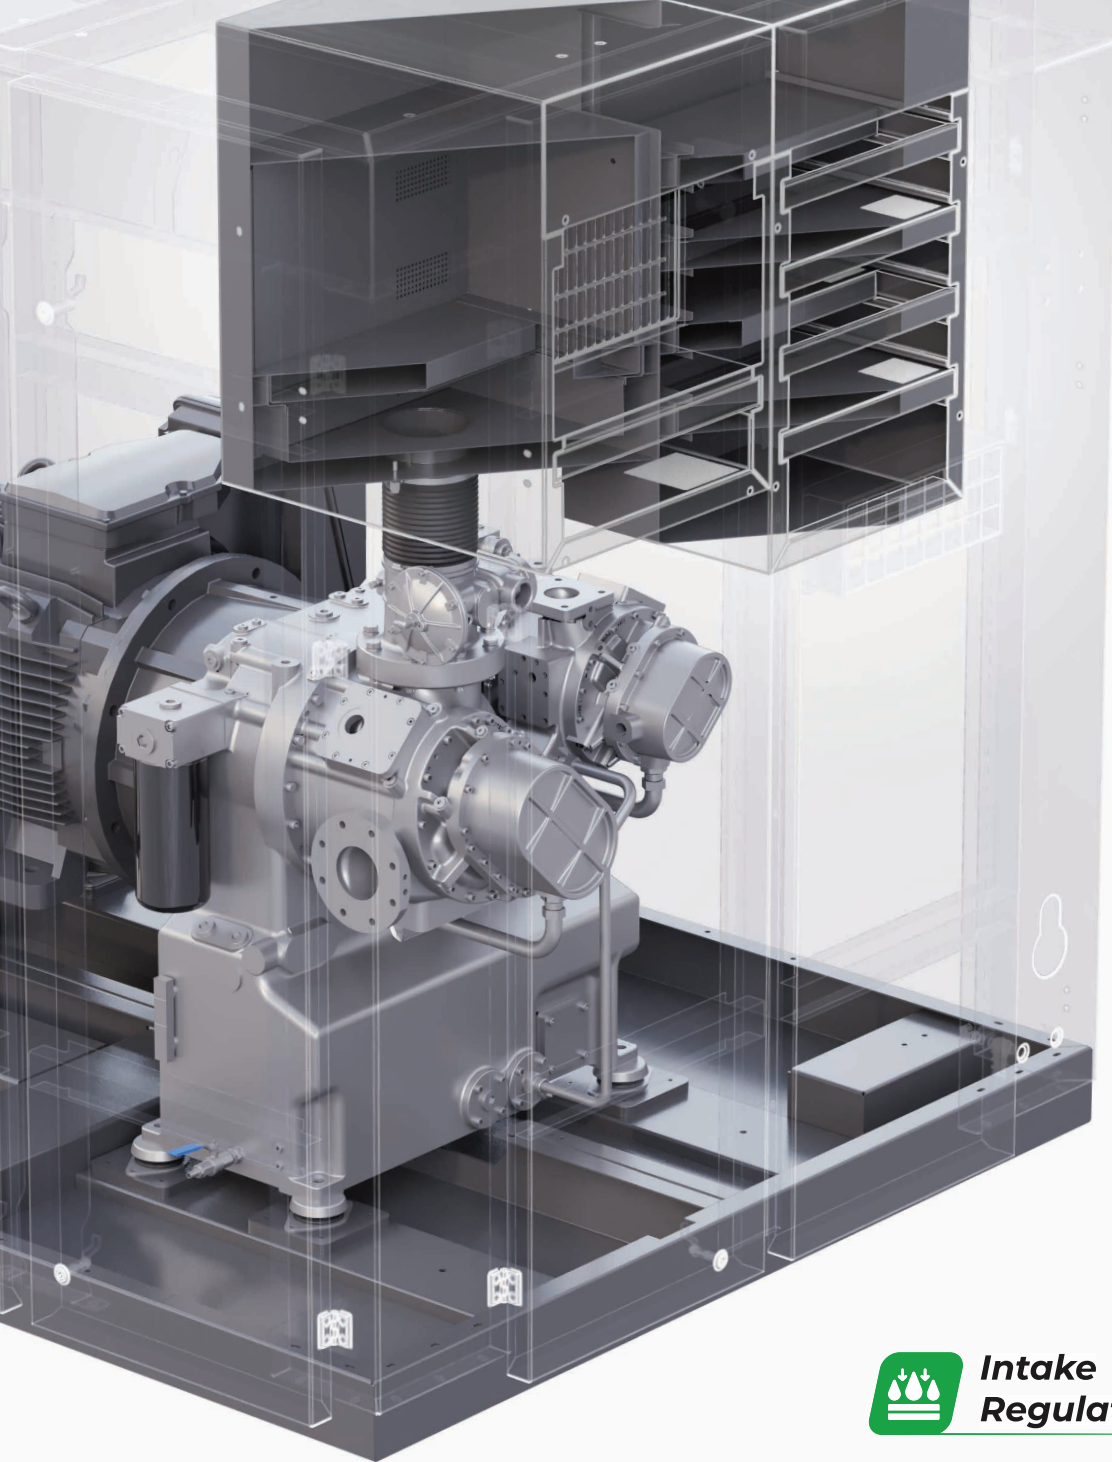

Intake Regulator


- Easy-to-maintain and reliable valves not affected by pollution and condensation
- Thanks to their superior reliability and ease of maintenance, hydraulic intake regulators outperform pneumatic alternatives, ensuring smoother and more dependable operation
- Low noise levels achieved by the intake shutters

Advantages

- Produces less filter waste than oil-injected compressors, which reduces your maintenance costs down.
- It can be used safely in sensitive industries such as food and pharmaceutical for the highest hygiene.
- Highly durable performance suitable for working in the harshest operational conditions.
- Models with VSD technology save up to 35% energy and reduce your energy costs.
- Special venturi design prevents rapid pressure fluctuations and high-frequency vibrations.


Cooling System


- A compact cooling block that integrates an intercooler, a pre-cooler, an after cooler, and an oil cooler into a single system
- Two-stage cooling with pre-cooler system made of stainless steel pipes and fins
- After-cooler with aluminium bar and plate system
- Efficient cooling and minimal noise levels with low-speed radial fans
- Easy to maintain and clean
- Washable panel filter
- Optimum in-cabinet air circulation to keep the motor and screw block cool

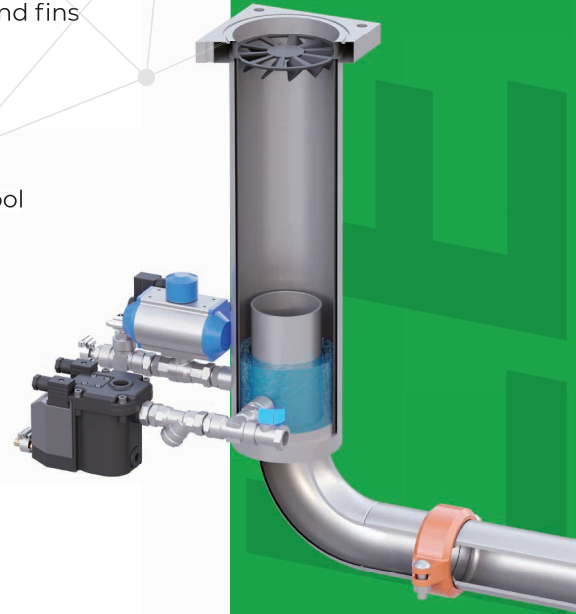



Water Separator

- Improved design for highly efficient water separation at the cooler outlet with minimum pressure loss
- Energy-efficient and zero-loss electronic drain system drains the water before the compressed air is sent to the dryer

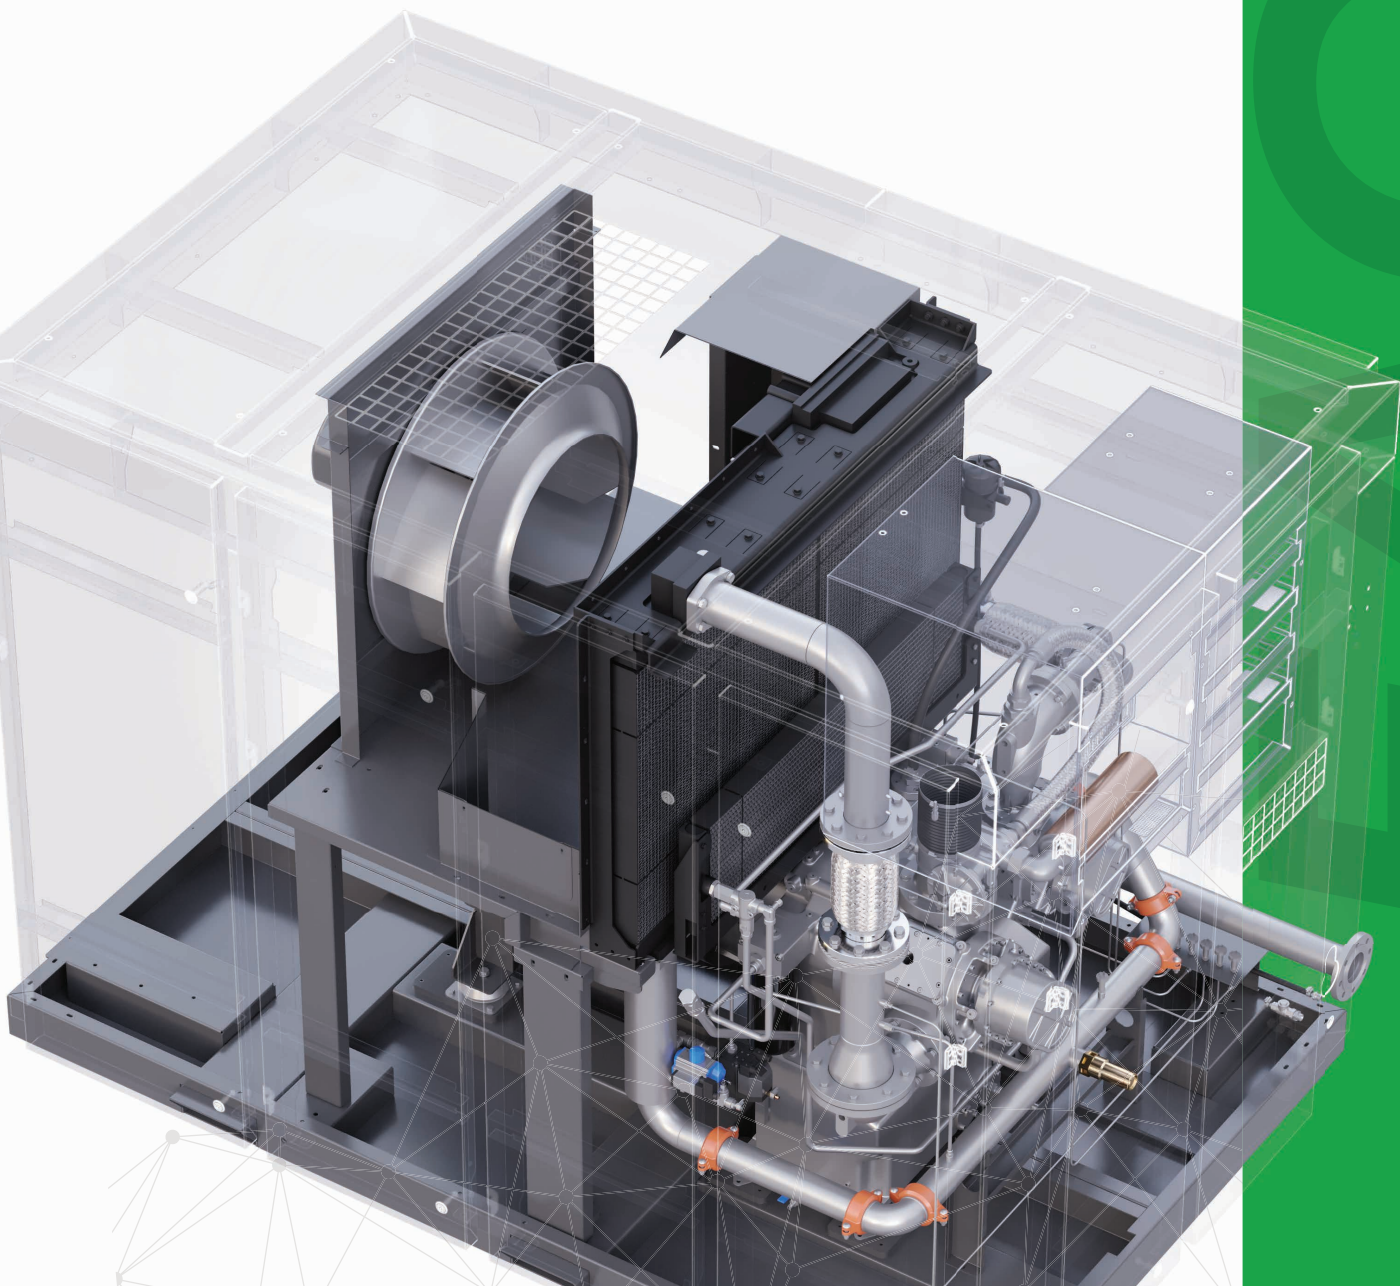

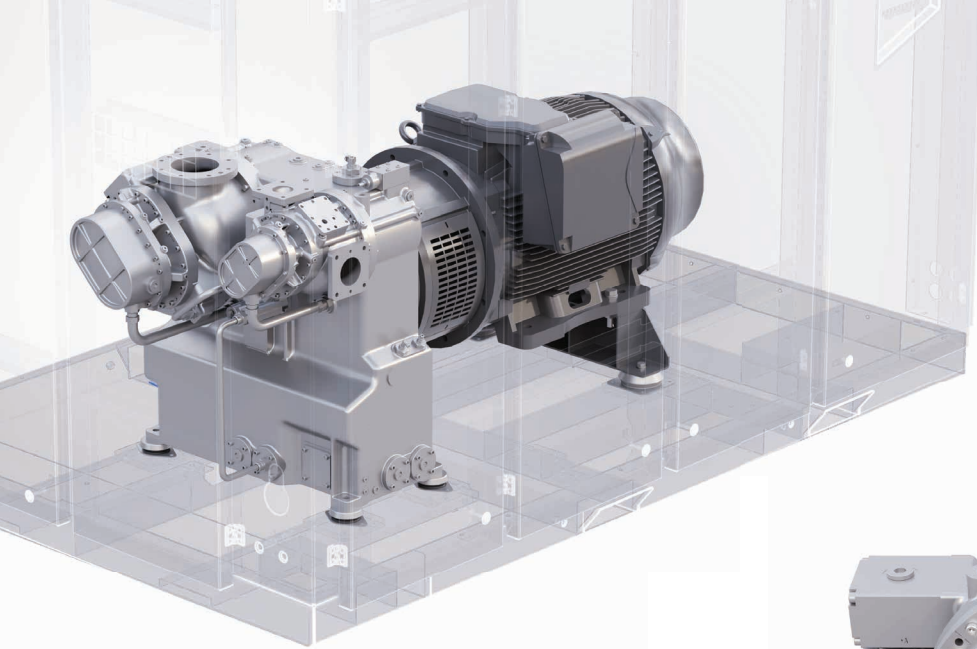

SmartCoat

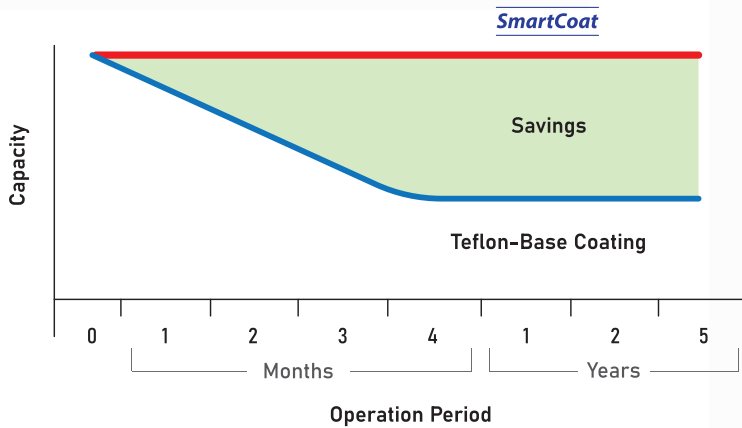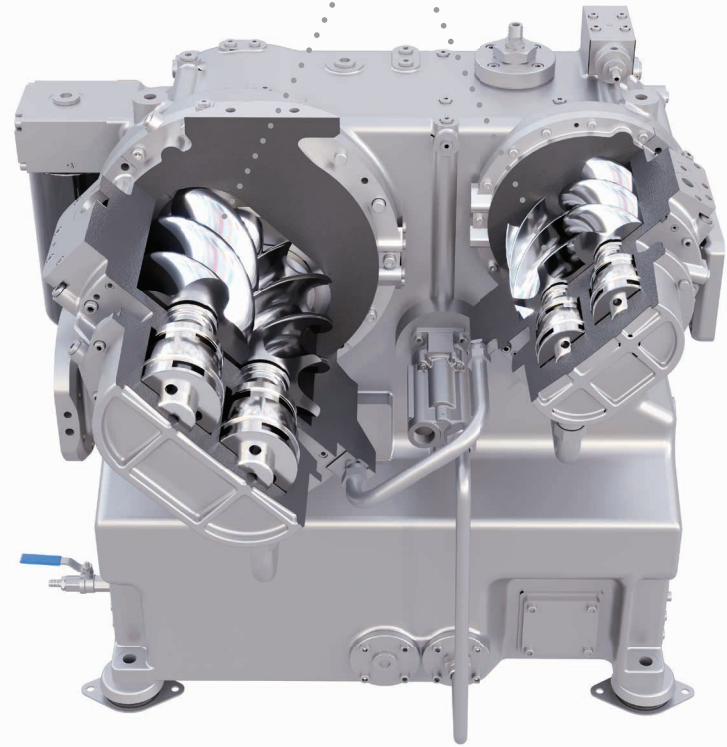

Screw Block

- Two-stage screw block
- Bearing system developed with the latest technology ensures long life and vibration-free operation
- Lower overall volume achieved by integrating the oil sump into the gearbox
- High level sealing system ensures high performance even during long operation periods
- Synchronizing gears for contact-free power transmission between the rotors
- Minimal footprint achieved with the compact screw block featuring an integrated water cooling system (270-340 HP)
- Specially coated rotors and rotor housing internal parts for minimum gap tolerance and high efficiency
- Stainless steel rotors to eliminate the risk of corrosion and locking, for a long service life
- SmartCoat special material coating provides superior durability against high temperatures
- Jacket cooling for both stages
- Reliable operation with long bearing lifetimes
- Staged rotors made of stainless steel
- Lower overall volume achieved by integrating the oil sump into the gearbox



Certificates

- Our Eagle series compressors provide fully oil-free compressed air at the ISO 8573-1 (Class 0) standard and have been tested and approved by "TÜV Rheinland" Germany.
- Passed the performance tests in compliance with ISO 1217 Annex C and Annex E.

100%
OIL-FREE
COMPRESSED
AIR



ISO 8573-1
Class-0

It is designed in accordance with sensitive and accurate production conditions.

It protects the environment and saves energy.

It is produced in accordance with all global standards and regulations.

It prevents damage to your products and the contamination of your production lines.

Therefore, it eliminates unnecessary machine downtime.

It guarantees the high quality compressed air you need.



PHARMACEUTICAL



HEALTH



ELECTRONICS




FOOD & BEVERAGES

VSD What is VSD Technology?

Some of industrial operations, the demand for compressed air is variable.


In such conditions our compressors automatically adjust the compressor's operating speed to match air production to demand in real time, saving significant amounts of energy.

A traditional fixed speed air compressor can only operate at full capacity. Fixed speed compressors consume a lot of energy when less air is required and some of the energy is wasted.

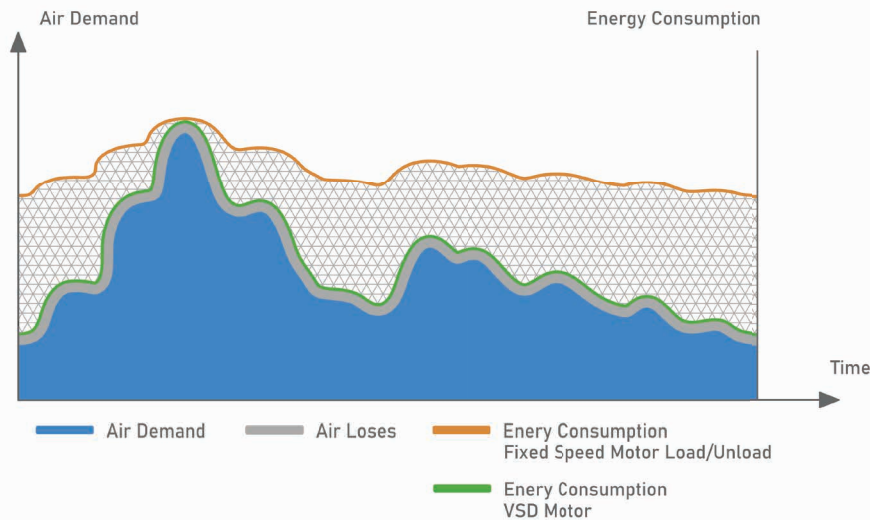

VSD Why Hertz VSD?

- Whereas VSD compressor works only according to the amount of need, it reduces the energy cost.
- There is no need to unload, which saves both time and energy.
- Air system pressure is more consistent and also lower, minimizing energy consumption and air leaks.
- Motor and inverter are specially designed to provide maximum efficiency.
- The motors have successfully passed tests performed in the harshest conditions such as high temperature and high pressure.
- Variable speed compressors vibrate less than the other models used in the market.

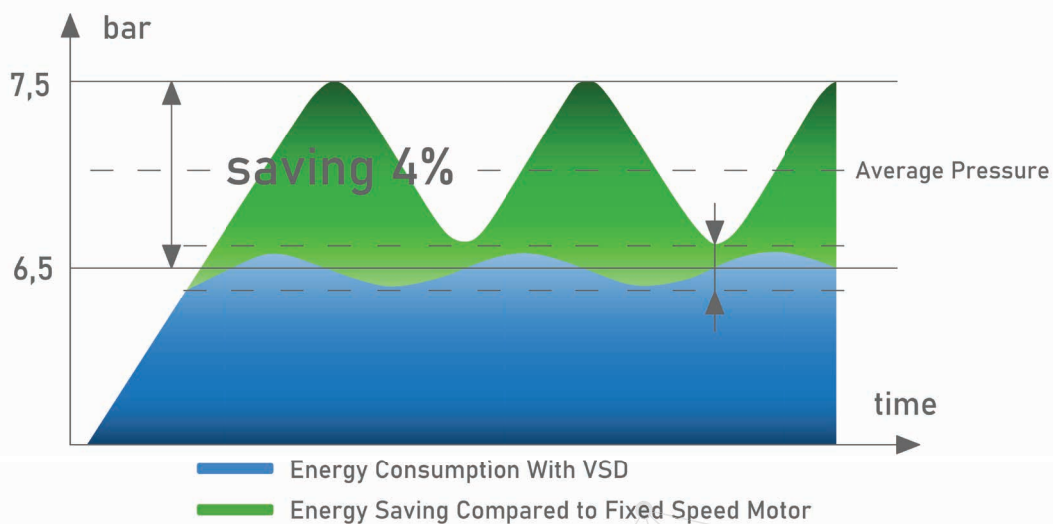

132

EAGLE
VSD

**WATER
COOLED**



Controller

- 7-inch Touchscreen Color TFT Display
- Without the need for an external main controller, ability to work synchronized for up to 5 compressors
- Expandable I/O
- Weekly scheduler for starting / stopping the machine at 3 different time intervals can be individually set for each day of the week
- Dual PID feature on inverter-equipped models can run simultaneous PID for temperature and pressure
- Pressure PID on inverter-equipped models ensures energy-efficient operation by maintaining the pressure at the required level
- Temperature PID on inverter-equipped models controls the fan speed to maintain the screw block's most efficient operating temperature
- On inverter-equipped models, all inverter and compressor control data are managed from a single point
- Internal ModBus communication
- User-friendly on-screen interface
- Alarm log records the last 20 alarms
- Periodic maintenance warnings and log records

FIX Fixed Speed Models

60 Hz

Model	Pressure		Capacity*		Motor HP/KW	Connection	Air Cooled			Water Cooled		
	psi	bar	cfm	m ³ /min			Width x Length x Height (in.)	Weight (lbs)	Noise (dB)	Width x Length x Height (in.)	Weight (lbs)	Noise (dB)
EAGLE 110	100	7,5	711	20,1	150/110	ANSI 3"	129,5 x 83,5 x 94,1	10814	77	128,7 x 83,2 x 94,2	10097	75
	125	8,5	709	20								
	150	10,3	645	18,2								
EAGLE 132	100	7,5	851	24,1	175/132	ANSI 3"	129,5 x 83,5 x 94,1	11211	73	128,7 x 83,2 x 94,2	10494	72
	125	8,5	848	24								
	150	10,3	706	19,9								
EAGLE 160	100	7,5	1070	30,3	220/160	ANSI 3"	129,5 x 83,5 x 94,1	11222	77	128,7 x 83,2 x 94,2	10505	75
	125	8,5	963	27,2								
	150	10,3	845	23,9								
EAGLE 200	100	7,5	1340	37,9	270/200	ANSI 3"	138,4 x 90,2 x 99,7	14110	81	141,1 x 78,5 x 82,9	14154	75
	125	8,5	1338	37,9								
	150	10,3	1179	33,3								
EAGLE 250	100	7,5	1495	42,3	340/250	ANSI 3"	138,4 x 90,2 x 99,7	14110	82	141,1 x 78,5 x 82,9	14154	75
	125	8,5	1365	38,6								
	150	10,3	1309	37								

VSD Variable Speed Models

60 Hz

Model	Pressure		Capacity*				Motor HP/kW	Connection	Air Cooled			Water Cooled		
	psi	bar	Minimum		Maximum				Width x Length x Height (in.)	Weight (lbs)	Noise (dB)	Width x Length x Height (in.)	Weight (lbs)	Noise (dB)
			cfm	m ³ /min	cfm	m ³ /min								
EAGLE 110 VSD	100	7,5	431	12,2	750	21,2	150/110	ANSI 3"	129,5 x 83,5 x 94,1	11266	73	128,9 x 83,4 x 94	10560	75
	125	8,5	430	12,2	706	19,9								
	150	10,3	424	12	545	15,4								
EAGLE 132 VSD	100	7,5	436	12,4	806	22,8	175/132	ANSI 3"	129,5 x 83,5 x 94,1	11266	73	128,9 x 83,4 x 94	10571	72
	125	8,5	433	12,3	723	20,4								
	150	10,3	424	12	670	18,9								
EAGLE 160 VSD	100	7,5	482	13,7	942	26,7	220/160	ANSI 3"	129,5 x 83,5 x 94,1	11464	77	128,9 x 83,4 x 94	10714	75
	125	8,5	477	13,5	878	24,9								
	150	10,3	535	15,1	801	22,7								
EAGLE 200 VSD	100	7,5	686	19,4	1438	40,7	270/200	ANSI 3"	138,4 x 90,2 x 99,7	14374	76	141,1 x 77,9 x 82,7	14440	71
	125	8,5	692	19,6	1399	39,6								
	150	10,3	709	20	1262	35,7								
EAGLE 250 VSD	100	7,5	698	19,8	1535	43,4	340/250	ANSI 3"	138,4 x 90,2 x 99,7	14374	76	141,1 x 77,9 x 82,7	14440	75
	125	8,5	691	19,6	1419	40,2								
	150	10,3	680	19,3	1293	36,6								

- Unit performances measured in reference conditions which are 1 bar /14.5 psig absolute air pressure, %0 relative humidity, 20°C/68 °F inlet air temperature, 71°C/160 °F thermostatic valve set temperature and use of Smartoil.

- Hertz reserves its rights to make changes in its products and specifications without prior notice.

* Refers to free air delivery measured according to ISO 1217:2009, Annex C and E standard.

** Refers to sound Pressure level measured according to ISO 2151:2008 and ISO 3744:2010 with ± 3 dB(A) tolerance.

