


COMPRESSOR DATA SHEET

**In Accordance With Federal Uniform Test Method for Certain Lubricated Air Compressors
Rotary Compressor: Variable Frequency Drive**

MODEL DATA - FOR COMPRESSED AIR

1	Manufacturer: Hertz Kompressoren		
2	Model Number:	HVD 132	Date: 05.27.22
	<input checked="" type="checkbox"/> Air-cooled <input type="checkbox"/> Water-cooled	Type: Screw	
	<input checked="" type="checkbox"/> Oil-injected <input type="checkbox"/> Oil-free	# of Stages:	1
3	Rated Operating Pressure	150	psig ^b
4	Drive Motor Nominal Rating	180	hp
5	Drive Motor Nominal Efficiency	96,4	percent
6	Fan Motor Nominal Rating (if applicable)	4,09	hp
7	Fan Motor Nominal Efficiency	55,7	percent
8*	Input Power (kW)	Capacity (acfm) ^{a,d}	Specific Power (kW/100 acfm) ^d
	167,2 Max	741,6	22,55
	142,0	610,7	23,25
	125,9	533,8	23,59
	110,2	456,3	24,15
	94,9	378,2	25,09
	73,7 Min	282,5	26,09
9*	Total Package Input Power at Zero Flow ^{c, d}	27,1	kW
10	Isentropic Efficiency	73,4	Percent

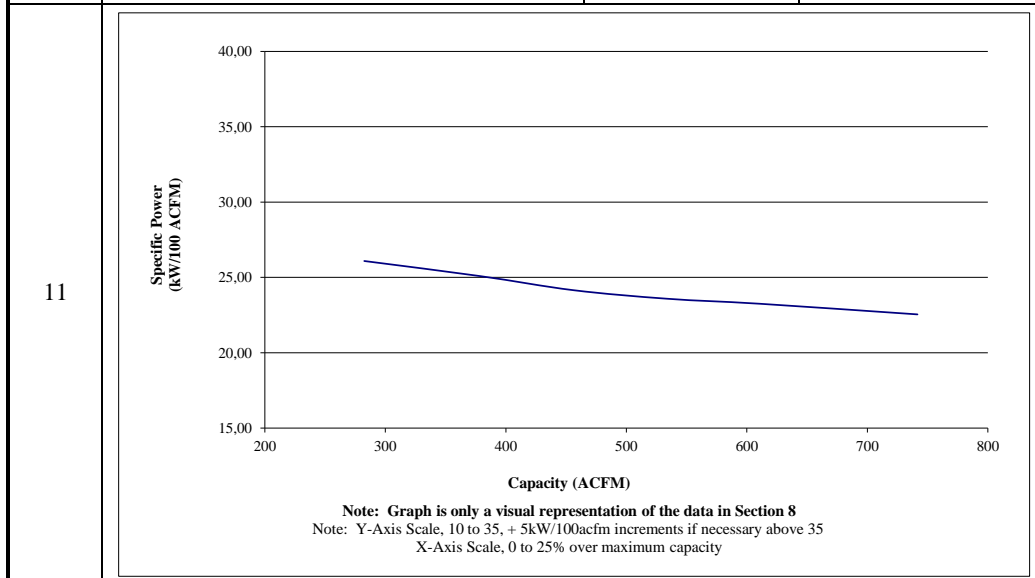

*For models that are tested in the CAGI Performance Verification Program, these items are verified by the third party administrator

Consult CAGI website for a list of participants in the third party verification program: www.cagi.org

NOTES:

- a. Measured at the discharge terminal point of the compressor package in accordance with ISO 1217, Annex E; ACFM is actual cubic feet per minute at inlet conditions.
- b. The operating pressure at which the Capacity (Item 8) and Electrical Consumption (Item 8) were measured for this data sheet.
- c. No Load Power. In accordance with ISO 1217, Annex E, if measurement of no load power equals less than 1%, manufacturer may state "not significant" or "0" on the test report.
- d. Tolerance is specified in ISO 1217, Annex E, as shown in table below:

NOTE: The terms "power" and "energy" are synonymous for purposes of this document.



Member

Volume Flow Rate at specified conditions		Volume Flow Rate	Specific Energy Consumption	No Load / Zero Flow Power
$\frac{m^3}{min}$	$\frac{ft^3}{min}$	%	%	%
Below 0.5	Below 17.6	+/- 7	+/- 8	
0.5 to 1.5	17.6 to 53	+/- 6	+/- 7	+/- 10%
1.5 to 15	53 to 529.7	+/- 5	+/- 6	
Above 15	Above 529.7	+/- 4	+/- 5	

ROT 031.1